

IPART APPROVED



Product Features:



- Energy efficient LED High Bay Light with high efficacy, long lifetime CREE chips
- Replaces conventional MV and MH High bays
- Top brand Meanwell HLG driver used for long lifespan
- 3-D heat dissipation design creating airflow inside the heatsink maximizing heat dissipation
- Flake designed high-purity aluminum reflector improving light distribution and efficiency
- The high transparency optic LED lens reduce glare and dustproof, milky cover also available
- 1.2 metres flex and 3 pin plug standard
- 5 year replacement warranty



Application:

- Industrial factories, workshops and warehouses
- Commercial storage and distribution centres

CREE LED High Bay E Series

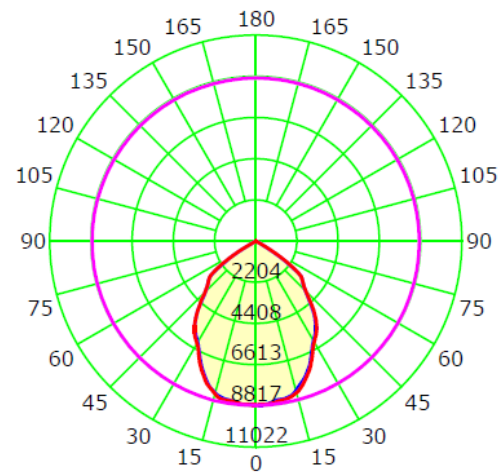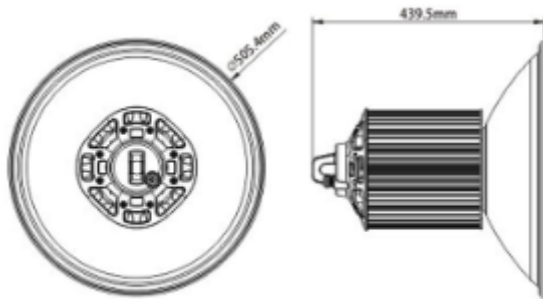

Unit: cd
 — C0-C180 — C90-C270 — G2

Quick Spec

- Luminous Efficacy:** 100 lm/w
- Color temperature:** 2700K- 6000K, CRI > 80
- Average rated LED life:** 60,500hrs @ L70
- Ambient temperature:** -35°C to 45°C
- Beam Angle:** 60°, 90°, 110°

Model	Watts	Supply Voltage	Lumen Output	Dim (mm)	Weight	IP Rating
SL-BL-150WE-C	150W	AC85-265V,50Hz	15000lm	Ø505*H440	5.5kgs	IP20