

Product Features:




- Energy efficient, high performance LED Flood Light
- Replaces conventional MV and MH light
- More than 50% energy savings compared to conventional lamps
- Cross-ventilation heat sink design for better heat dissipation
- Quality fitting with baking finish treatment for excellent corrosiveness resistance
- High transparency tempered glass lens achieving more than 93% light transmittance
- 3 year replacement warranty

Application:

- Commercial and residential car parks
- Outdoor security lights
- Under canopy areas and loading bays



LED Flood Light F Series

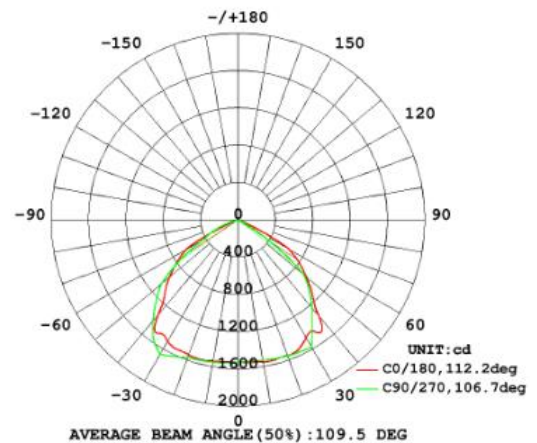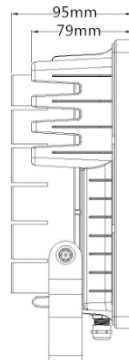

LDC: SL-FL-50WF

Quick Spec

- Luminous Efficacy:** 80 lm/w
- Color temperature:** 2700K- 6000K, CRI > 80
- Average rated LED life:** 50,000hrs @ L70
- Ambient temperature:** -35°C to 45°C
- Beam angle:** 100°

Model	Watts	Supply Voltage	Lumen Output	L*W*H (mm)	Weight	IP Rating
SL-FL-20WF	20W	AC85-265V,50Hz	1600lm	176*166*77	1.6Kgs	IP65
SL-FL-30WF	30W	AC85-265V,50Hz	2400lm	191*178*81	2.0Kgs	IP65
SL-FL-50WF	50W	AC85-265V,50Hz	4000lm	226*194*95	3.0Kgs	IP65