

# LED Low Bay L Series



## Product Features:

- Energy efficient LED Low Bay with popular beam angle design, 60° and 90°
- Compact and modern design, fitting height only 183mm, more applicable and attractive
- Replaces conventional MV and MH High bay and/or low bay lights, saving 2/3 of energy
- Meanwell HBG driver and Japan made Nichia 757 LED chip used for longer lifetime
- Integrated heat sink design for better heat dissipation outcome
- Optical lense cover used for less glare and softer light, and impact rating IK08 achieved
- Weatherproof design with IP66 rating
- 1.2 metres flex and 3 pin plug standard
- 5 year replacement warranty

## Application:

- Industrial factories, workshops and warehouses
- Indoor sports and exhibition halls / centers
- Outdoor canopy light and car parks



**IP66 IK08 UGR<23**

## Quick Spec



**Luminous Efficacy:** 127 lm/w

**Color temperature:** 5700K, CRI > 70

**Average rated LED life:** 60,400hrs @ L70

**Ambient temperature:** -35°C to 45°C

**Beam Angle:** 60°, 90°

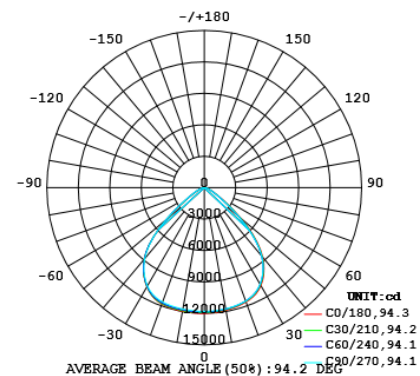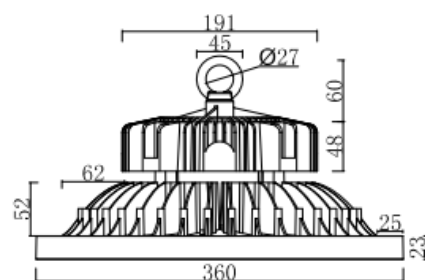

Model	Watts	Supply Volatage	Lumen Output	Dim (mm)	Weight	IP Rating
SL-BL-240WL-B	240W	AC90-305V,50Hz	29970lm	Ø360*H183	6.1kgs	IP65