

Product Features:

- **High Reliability:** constant output current
- **Warranty:** 5 years full replacement
- Instant hot and cold start/restart
- Thermal overload protection, short circuit protection
- Excellent EMC and EMF design
- Excellent power factor compensation design
- Operates in hot and cold environments


Application:

- Cylinder Induction Lamp
- Oval Induction Lamp
- Spherical Induction Lamp



Electronic Ballast for Induction Lamp

DIMENSION

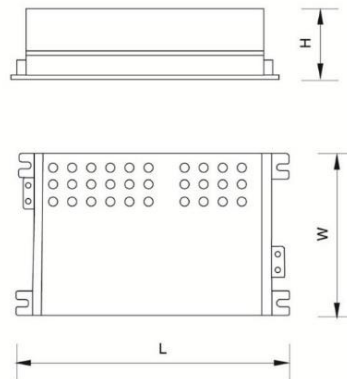

Model	Power Rating	Input Voltage	Input frequency	U-OUT (V)	Power factor	Temp ambient	L x W x H (mm)
SL304/40	40W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL304/50	50W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL304/65	65W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL304/85	85W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL300/100	100W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL304/120	120W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL300/150	150W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL304/165	165W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x100x51
SL300/200	200W	AC 240V	50Hz/60Hz	300V	≥0.98	-30°C~+40°C	155x110x61