



Product Features:


- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High efficiency:** system efficacy $\geq 65\text{lm/w}$, power factor ≥ 0.98
- **High color rendering:** CRI ≥ 80 , natural color appearance
- Zero flicker and low glare: reduces eye strain
- **Instant strike/hot restrike** & quiet operation
- Environmentally sustainable: lowers carbon emissions & saves energy
- **Warranty:** 5 years full replacement

Application:


- Street and community lights
- Garden and pathway lights

Cylinder Induction Lamp

DIMENSION

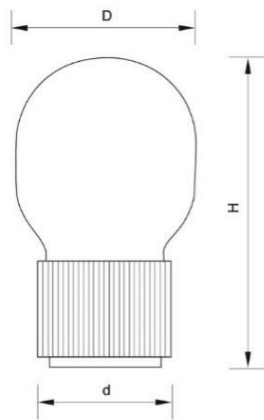

SPECTRUM FOR LIGHT SOURCE

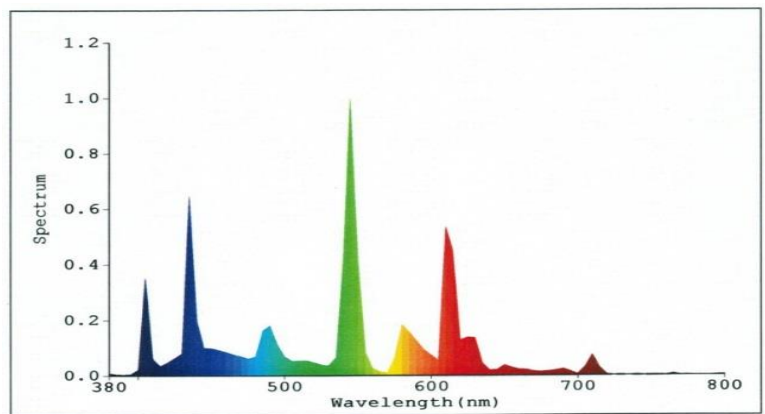

Model	Power Rating	Input Voltage	Flux	Efficacy	CCT	D x d x H
SL304/40	40W	240V, 50Hz	2600 lm	65 lm/w	3000-5000K	85x61x155
SL304/50	50W	240V, 50Hz	3250 lm	65 lm/w	3000-5000K	85x61x155