




Product Features:

- **Low profile**, surface mounted Induction luminaire
- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High color rendering:** CRI ≥ 80, natural color appearance
- **Zero flicker and low glare:** reduces eye strain
- **Instant strike/hot restrike** & quiet operation
- White powder coat housing with acrylic prismatic lens
- **Warranty:** 5 years full replacement


Application:

- Indoor sporting facilities
- Commercial warehouse
- Commercial showrooms
- Food processing plants
- Retail stores
- Industrial workshops

CLASSIC Induction Low Bay

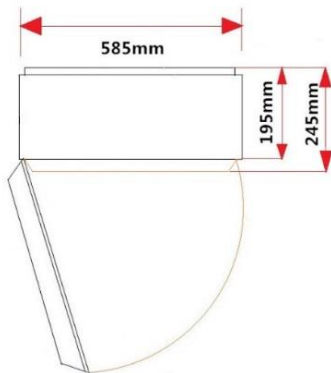

Luminous Intensity Distribution Curve

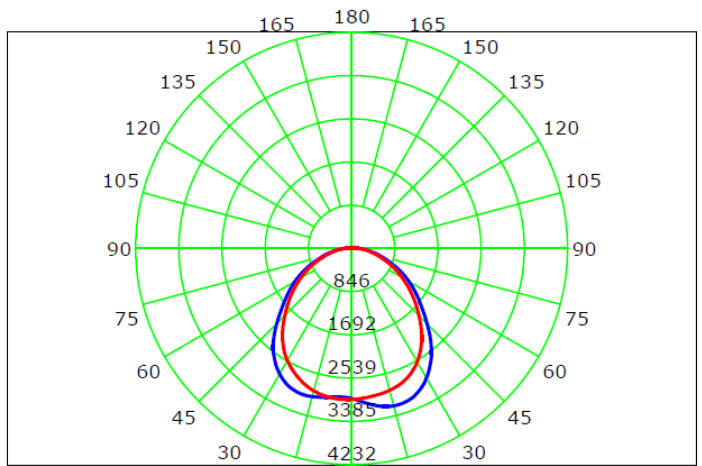

LDC: SL502/120A*2

Quick Spec

- Luminous Efficacy Lamp:** 65 lm/w
- Color temperature:** 3000-5000K
- Mounting heights:** 3-6 metres
- Housing Material:** White powder coated aluminium housing
- Accessories:** Acrylic prismatic lens included

| PRODUCT CODE | LAMPS | WATTS | LUMEN OUTPUTS | LOR | DIMENSIONS | NET WEIGHT |
|--------------|----------|-------|---------------|-----|---------------|------------|
| SL502/150A | 150W x 1 | 148W | 6278 lm | 66% | 585x585x245mm | 9.6kg |
| SL502/200A | 200W x 1 | 198W | 8041 lm | 63% | 585x585x245mm | 9.8kg |
| SL502/120A*2 | 120W x 2 | 239W | 9182 lm | 60% | 585x585x245mm | 11.3kg |