





**Product Features:**

- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High color rendering:** CRI ≥ 80, natural color appearance
- **Zero flicker and low glare:** reduces eye strain
- Instant strike/hot restrike & quiet operation
- **Highbeam aluminium reflector** designed for high ceiling application
- **Fitting assembled and tested in Australia**
- 1.5 metres Flex and Plug standard
- **Warranty:** 5 years full replacement

**Application:**

- Industrial workshops and warehouses
- Commercial storage and distribution centres
- Food processing and direct factory outlets

## HIGHBEAM Induction High Bay

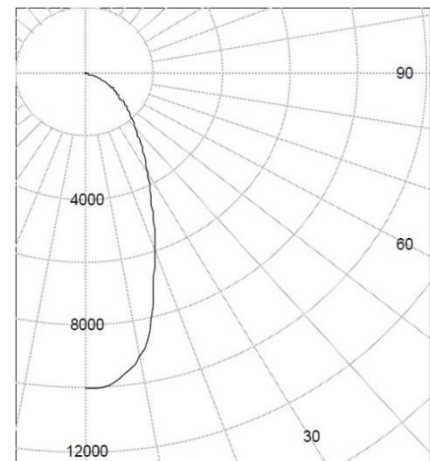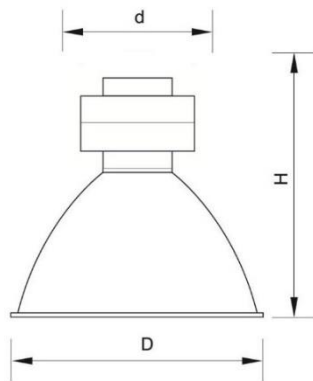

LDC: SL602/200B

**Quick Spec:**

- Luminous Efficacy Lamp:** 65 lm/w
- Color temperature:** 3000-5000K
- Mounting heights:** 8-12 metres
- Housing Material:** Die cast aluminium gear box
- Accessories:** Enclosed Glass or Acrylic lens

Model	Watts	Supply Voltage	LOR	D x d x H	Weight	IP Rating
SL602/150B	150W	240V, 50Hz	80%	500 x 240 x 380	3.3 kg	IP20
SL602/200B	200W	240V, 50Hz	80%	500 x 240 x 380	3.4 kg	IP20