

Product Features:




- High power energy efficient LED Flood Light
- Replaces conventional MV and MH light
- More than 50% energy savings compared to conventional lamps
- Meanwell HLG driver and CREE XB-D LED used for longer lifetime
- Narrow beam light distribution available
- Cross-ventilation heat sink design for better heat dissipation
- Quality fitting with baking finish treatment for excellent corrosiveness resistance
- High transparency tempered glass lens achieving more than 93% light transmittance
- 5 year replacement warranty

Application:

- Widely used in industrial, sport stadium, public square, community garden, gas station, and tunnels.



High Beam LED Flood Light I Series

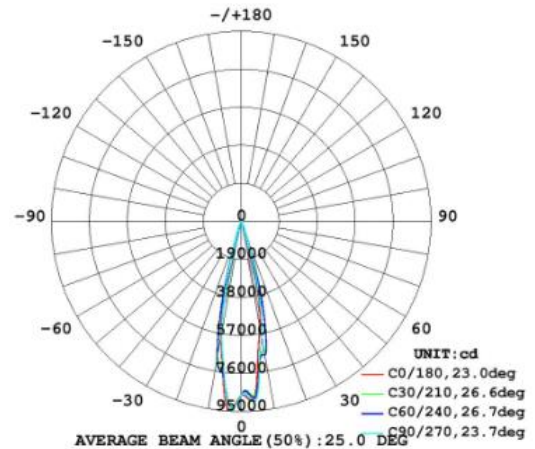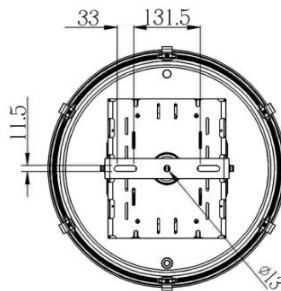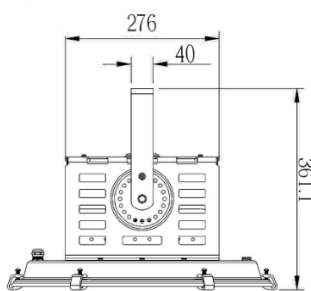

LDC: SL-FL-250WI-C

Quick Spec

- Luminous Efficacy:** 90 lm/w
- Color temperature:** 2700K- 6000K, CRI > 80
- Average rated LED life:** 60,500hrs @ L70
- Ambient temperature:** -35°C to 45°C
- Beam angle:** 25°@250W; 10°, 18°, 28°, 56°@500W

Model	Watts	Supply Voltage	Lumen Output	Dim (mm)	Weight	IP Rating
SL-FL-250WI-C	250W	AC85-265V,50Hz	22500lm	Ø468*H361	13.0kgs	IP65
SL-FL-500WI-C	500W	AC85-265V,50Hz	45000lm	Ø480*H391	14.5kgs	IP65