





Product Features:

- Energy efficient LED High Bay, wide power range, also available in 60W, 80W, 100W, 300W.
- Replaces conventional MV and MH High bays
- Meanwell HLG driver and CREE/Philips LED applied to all high bay lights
- 3-D heat dissipation design creating airflow inside the heatsink maximizing heat dissipation
- Quality acrylic reflector improving light distribution and efficiency
- The high transparency optic LED lens reduce glare and dustproof, milky cover also available
- 1.2 metres flex and 3 pin plug standard
- 5 year replacement warranty

Application:

- Industrial factories, workshops and warehouses
- Commercial storage and distribution centres

LED High Bay EP Series

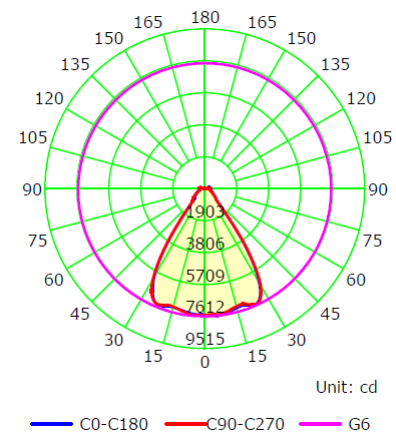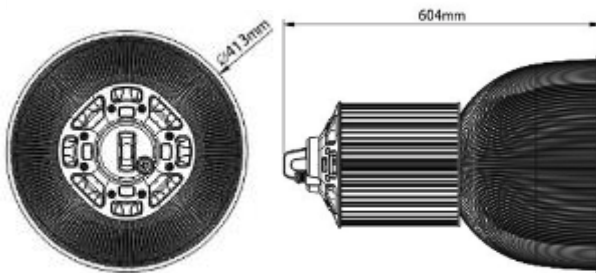

LDC: SL-BL-150WEP-P

Quick Spec

- Luminous Efficacy:** 100 lm/w
Color temperature: 2700K- 6000K, CRI > 80
Average rated LED life: 50,000hrs @ L70
Ambient temperature: -35°C to 45°C
Beam Angle: 60°, 90°, 110°

Model	Watts	Supply Voltage	Lumen Output	Dim (mm)	Weight	IP Rating
SL-BL-120WEP-P	120W	AC85-265V,50Hz	12000lm	Ø413*H604	6.0kgs	IP20
SL-BL-150WEP-P	150W	AC85-265V,50Hz	15000lm	Ø413*H604	6.0kgs	IP20
SL-BL-200WEP-P	200W	AC85-265V,50Hz	20000lm	Ø413*H604	7.5kgs	IP20