



Product Features:


- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High efficiency:** system efficacy $\geq 65\text{lm/w}$, power factor ≥ 0.98
- **High color rendering:** CRI ≥ 80 , natural color appearance
- Zero flicker and low glare: reduces eye strain
- **Instant strike/hot restrike** & quiet operation
- Environmentally sustainable: lowers carbon emissions & saves energy
- **Warranty:** 5 years full replacement

Application:


- Industrial high bay
- Commercial flood lights
- Street and community lights
- Tunnel lights

Oval Induction Lamp

DIMENSION

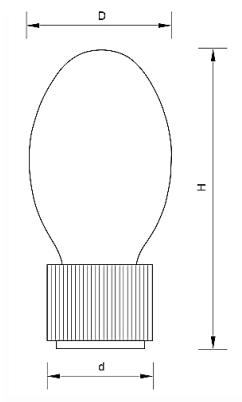

SPECTRUM FOR LIGHT SOURCE

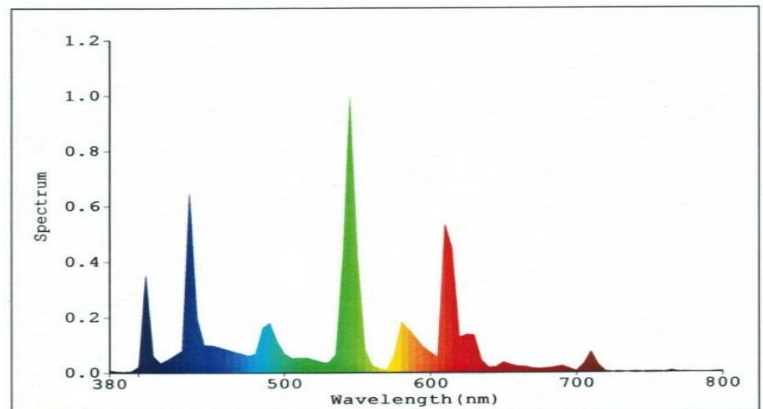

Model	Power Rating	Input Voltage	Flux	Efficacy	CCT	D x d x H
SL304/65	65W	240V,50Hz	4225 lm	65 lm/w	3000-5000K	90X61X193
SL304/85	85W	240V,50Hz	5225 lm	65 lm/w	3000-5000K	90x61x193
SL302/100	100W	240V,50Hz	6500 lm	65 lm/w	3000-5000K	120x61x238
SL304/120	120W	240V,50Hz	7800 lm	65 lm/w	3000-5000K	120x61x238
SL302/150	150W	240V,50Hz	9750 lm	65 lm/w	3000-5000K	120x61x238
SL304/165	165W	240V,50Hz	10725 lm	65 lm/w	3000-5000K	125x61x250