



Product Features:


- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High efficiency:** system efficacy $\geq 65\text{lm/w}$, power factor ≥ 0.98
- **High color rendering:** CRI ≥ 80 , natural color appearance
- Zero flicker and low glare: reduces eye strain
- **Instant strike/hot restrike** & quiet operation
- Environmentally sustainable: lowers carbon emissions & saves energy
- **Warranty:** 5 years full replacement

Application:


- Industrial high bay
- Commercial low bay
- Street and tunnel lights

Spherical Induction Lamp

DIMENSION

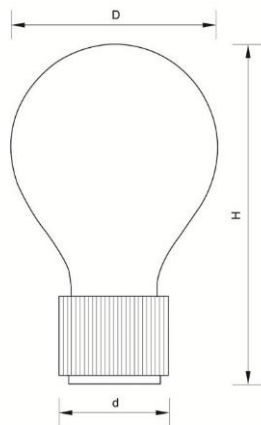

SPECTRUM FOR LIGHT SOURCE

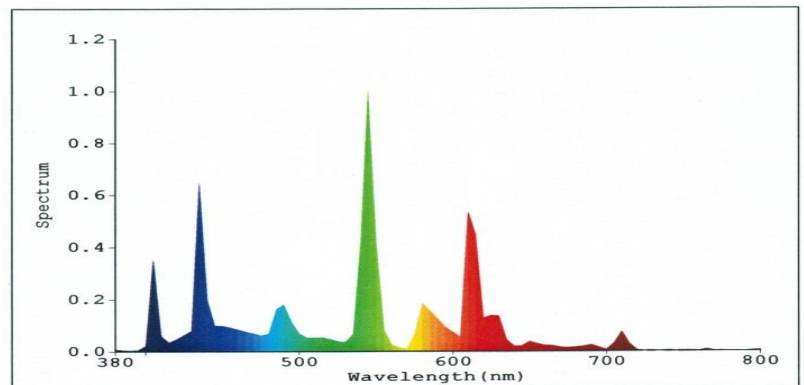

Model	Power Rating	Input Voltage	Flux	Efficacy	CCT	D x d x H
SL303/200	200W	240V, 50Hz	13000 lm	65 lm/w	3000-5000K	150x66x238