

CLASSIC Induction High Bay



Product Features:

- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High color rendering:** CRI ≥ 80, natural color appearance
- **Zero flicker and low glare:** reduces eye strain
- Instant strike/hot restrike & quiet operation
- **Parabolic aluminium reflector** designed to provide uniform light distribution
- **Fitting assembled and tested in Australia**
- 1.5 metres Flex and Plug standard
- **Warranty:** 5 years full replacement

Application:

- Industrial workshops and warehouses
- Commercial storage and distribution centres
- Food processing and direct factory outlets



Quick Spec



Luminous Efficacy: 65 lm/w

Color temperature: 3000-5000K

Mounting heights: 5-8 metres

Housing Material: Die cast aluminium gear box

Accessories: Enclosed Glass or Acrylic lens

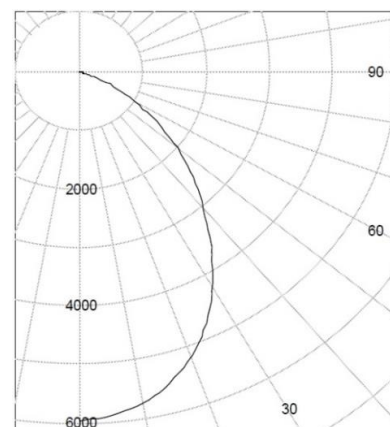

LDC: SL602/200A

Model	Watts	Supply Volatage	LOR	d x D x H	Weight	IP Rating
SL602/150A	150W	240V, 50Hz	83%	515 x240 x 410	3.6 kg	IP20
SL602/200A	200W	240V, 50Hz	83%	515 x 240 x 410	3.7 kg	IP20