





Product Features:

- **Long life:** up to 100,000 hours lifespan
- **Low degradation:** estimated 70% of original light output at 60,000 hours
- **High color rendering:** CRI ≥ 80 , natural color appearance
- **Zero flicker and low glare:** reduces eye strain
- **Instant strike/hot restrike** & quiet operation
- Fitting assembled and tested in Australia
- Suitable for downward and upward aiming
- 1.5 metres Flex and Plug standard
- **Warranty:** 5 years full replacement

Application:

- Building façade
- Commercial car parks
- Patio areas and driveways
- Commercial billboards

C Type Induction Floodlight

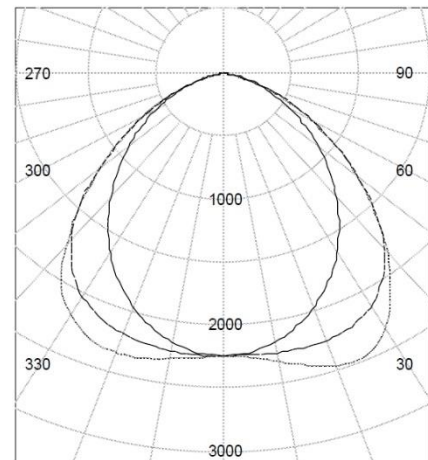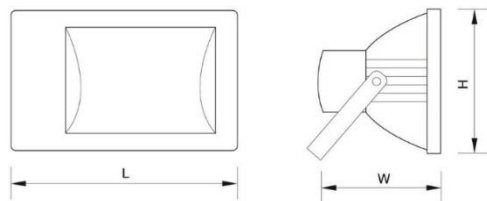

LDC: SL701/150C

Quick Spec

Luminous Efficacy Lamp: 65lm/w
Color temperature: 3000-5000K
Mounting heights: 3-6 metres
Housing material: Die-cast aluminium with tempered glass lens

Model	Wattage	Supply Voltage	L	W	H	IP rating
SL701/100C	100W	240V, 50Hz	415	240	320	IP65
SL701/150C	150W	240V, 50Hz	415	240	320	IP65