

# SMD Adjustable Downlight



## Product Features:

- Energy efficient SMD LED downlight with adjustable head, tiltable 25° each way
- High lumen output SA A LED chip adopted for long lifetime
- Quality proven BTON LED driver dimmable on most Leading and/or Trailing Edge and Universal Dimmers
- Quality PMMA diffuser for even light distribution and direct glare control
- Multiple finishes color: White, Silver, Chrome
- Standard Cut out: Ø 95-100mm
- 0.6m Flex and 2 pin plug standard
- 3 year replacement warranty

## Application:

- Commercial and residential applications where adjustable and low glare required



## Quick Spec



**Luminaire efficacy:** 70 lm/w

**Color temperature:** 3000k/4000k/5000k/5700k

**Average rated LED life:** 50,000 hrs @L70

**Ambient temperature:** -35°C to 45°C

**Beam Angle:** 90°

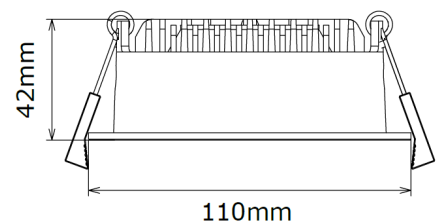

Model	Watts	Supply Volatage	Lumen Output	Size (mm)	Weight	IP Rating
SL-CL30-13W-D	13W	AC200-240V,50Hz	760-910lm	Ø110*42	0.4kgs	IP20