

High Power Low Glare SMD Downlight



Product Features:

- Energy efficient high power recessed SMD downlight with anti-glare deep reflector
- PMMA diffuser adopted for optimum glare control and even light distribution
- Quality proven BTON LED driver dimmable on Trailing Edge, Universal and LED Dimmers
- Large Aluminium Heat sink for advanced heat dissipation
- IP44 rating suitable for damp environment
- Cut out: 160-180mm
- 0.6m Flex and 2 pin plug standard
- 3 year replacement warranty

Application:

- Commercial and residential applications where high power, fixed head and low glare control required



Quick Spec



Luminaire efficacy: 95 lm/w

Color temperature: 3000k/4000k/5000k

Average rated LED life: 40,000 hrs @L70

Ambient temperature: -35°C to 45°C

Beam Angle: 60°

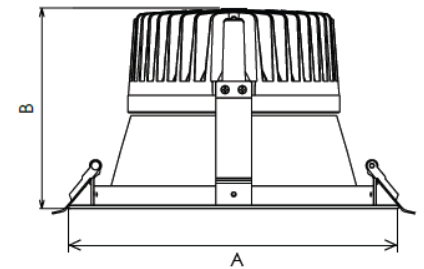

Model	Watts	Supply Volatage	Lumen Output	Size (mm)	Weight	IP Rating
SL-DL83-3-13W	13W	AC220-240V,50Hz	1000-1160lm	Ø110*H80	90-100mm	IP20
SL-DL83-6-25W	25W	AC220-240V,50Hz	2350-2500lm	Ø190*H100	160-180mm	IP20
SL-DL83-8-35W	35W	AC220-240V,50Hz	3300-3700lm	Ø230*H110	200-220mm	IP20